



Thermia Atec



Atec

The air/water heat pump that delivers maximum performance and comfort, year round.

Thermia Atec sets a new standard for air/water heat pumps.

With a superior seasonal performance* Thermia Atec delivers maximal energy savings. By a unique acoustic design, it is very quiet in operation. The cooling function assures a pleasant indoor climate also during the hottest period of the year. And if you have a swimming pool, you can reduce the heating cost significantly as Thermia Atec is prepared for heating of pools.

Thermia Atec is developed using the latest technology. The energy consumption is put to a minimum by continually optimizing the three key performance parameters of air flow (variable-speed EC fan), heating circuit flow (electronic expansion valve) and heat distribution flow (Optimum technology). Energy is collected from the outdoor air, and is used to heating of hot water and hydronic heating systems, delivering efficient energy savings at temperatures as low as -20°C. This means you can reduce your energy consumption for heating by up to 75 percent.

Thermia Atec is available in a range of output sizes, and can be combined from 6 to 36 kW. It consists of two parts: the heat pump itself, which is installed outdoors, and an indoor unit. You can choose from four versions of the indoor unit, each with different features. The choice of unit depends on the set-up of your heating system, to ensure you never pay for more than you actually need.



A++ energy class when the heat pump is part of an integrated system, applies to Atec 13
A++ energy class when the heat pump is the sole heat generator, applies to Atec 13
Energy class according to Eco-design Directive 811/2013



Technical data Atec

Connection

- 1 Supply line heating system: 28 mm Cu
- 2 Return line heating system: 28 mm Cu

Indoor packages



W: 380 mm
D: 204 mm
H: 600 mm

STANDARD

- Control panel



W: 420 mm
D: 260 mm
H: 730 mm

PLUS

- Control panel
- Immersion heater (3/6/9/12/15 kW 3~400V; 3/6/9 kW 1~230 V)
- Optimum controlled circulation pump Class A
- Three way valve for heating or hot water production



W: 596 mm
D: 690 mm
H: 1538 mm

TOTAL COMPACT


- Control panel
- Hot water tank, 180 litre
- Optimum controlled circulation pump Class A
- Three way valve for heating or hot water production
- Immersion heater (3/6/9/12/15 kW 3~400 V; 1,5/3/4,5 kW 1~230 V)
- Total feature additional free space in the lower part of the unit might be used for the extra 60 liters volume tank (available as an accessory) or for the expansion vessel or/and hydraulic connections
- Total +60 feature extra 60 liters volume tank and 12 liters expansion vessel.



W: 596 mm
D: 690 mm
H: 1845 mm

TOTAL +60

Outdoor unit

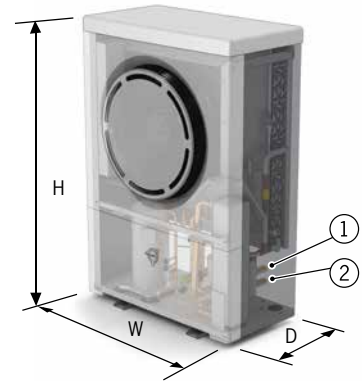

Atec			6	9	11	13	16	18
Refrigerant	Type		R407C	R407C	R407C	R407C	R407C	R407C
	Amount ¹	kg	4,0	4,3	5,0	5,1	5,6	5,6
	Test pressure	MPa	3,4	3,4	3,4	3,4	3,4	3,4
	Design pressure	MPa	3,1	3,1	3,1	3,1	3,1	3,1
Compressor	Type		Scroll	Scroll	Scroll	Scroll	Scroll	Scroll
	Oil		POE	POE	POE	POE	POE	POE
	Main supply	Volt	400	400	400	400	400	400
	Rated power, compressor	kW	2,2	2,9	3,3	4,2	5,0	6,1
Electrical data 3-N, ~50Hz	Rated power, fan	kW	0,2	0,2	0,2	0,3	0,3	0,7
	Start current	A	12	10	18	17	18	18
	Fuse	A	10	10	16	16	16	16
	Electrical data 1-N, ~50Hz	Main supply	Volt	230	230	230	230	230
Rated power, compressor		kW	2,4	2,8	3,6	4,3	5,5	-
Rated power, fan		kW	0,2	0,2	0,2	0,3	0,3	-
Start current		A	11	21	26	28	38	-
Performance	Fuse	A	20	20	25	32	32	-
	COP ²		4,7	4,7	5,0	4,7	4,6	4,3
	COP ³		4,3	4,4	4,7	4,4	4,1	4,0
	Heating capacity ³	kW	6,5	8,6	11,1	12,3	15,2	17,6
Energy class - system ¹⁰	Power input - heating ³	kW	1,5	2,0	2,4	2,8	3,7	4,4
	EER ⁴		2,2	2,4	2,5	2,4	2,3	2,3
	Cooling capacity ⁴		4,2	5,9	7,5	8,9	10,4	13,1
	Power input - cooling ⁴		1,9	2,5	3,0	3,7	4,5	5,7
Energy class - product ¹¹	Floor heating (35°C)		A+	A+	A++	A++	A++	A+
	Radiator (55°C)		A+	A++	A+	A++	A+	A+
Nominal flow ⁵	Floor heating (35°C)		A+	A+	A++	A+	A++	A+
	Radiator (55°C)		A+	A++	A+	A++	A+	A+
	Domestic hot water		B	A	A	A	B	B
Operating range (outdoor)	Heating circuit	l/s	0,150	0,216	0,263	0,299	0,372	0,432
	Heating circuit	°C	-20~+45	-20~+45	-20~+45	-20~+45	-20~+45	-20~+45
Max temperature ⁶	Heating circuit	°C	60	60	60	60	60	60
	Low pressure	MPa	0,05	0,05	0,05	0,05	0,05	0,05
	Operating	MPa	2,85	2,85	2,85	2,85	2,85	2,85
Pressure levels	High pressure	MPa	3,1	3,1	3,1	3,1	3,1	3,1
	Normal drift ⁷	dB(A)	61	61	61	62	66	76
Sound power level	"Silent mode" ⁷	dB(A)	60	59	60	61	64	71
	Normal drift ⁸	dB(A)	46	46	46	47	51	61
Sound pressure level	"Silent mode" ⁸	dB(A)	45	44	44	46	48	55
	Outdoor unit	kg	125	131	150	155	185	191
Weight	Standard	kg	18	18	18	18	18	18
	Plus	kg	21	21	21	21	21	21
	Total	kg	106	106	106	106	-	-
	Total (+60) ⁹	kg	142	142	142	142	-	-
	Total Compact	kg	100	100	100	100	-	-
Dimensions (Width x Depth x Height)	Outdoor unit	mm	856x510x1272	856x510x1272	1016x564x1477	1016x564x1477	1166x570x1557	1166x570x1557

The measurements are performed on a limited number of heat pumps which can cause variations in the results. Tolerances in the measuring methods can also cause variations.

* Seasonal performance is a measure of a heat pump's efficiency, on a yearly basis, incorporating hot and cold periods and the production of hot tap water.

1) The refrigerant circuit is hermetically sealed and subject to the F-gas directive. Global Warming Potential (GWP) for R407C according to EC 517/2014 is 1774, giving a CO₂ equivalent corresponding to: 6: 7096 kg, 9: 7628 kg, 11: 8870 kg, 13: 9047 kg, 16: 9934 kg, 18: 9934 kg
2) At A7/W35 Δ10K warm side (EN 255).
3) At A7/W35 according to EN 14511.

4) At A35/W7 according to EN 14511.

5) Nominal flow: heating circuit Δ10K.

6) At outdoor temperature 0°C.

7) According to SS-EN 12102, EN ISO 3741.

8) According to ISO 11203, cuboid-shaped measuring surface.

9) Built-in tank 60-litre volume version, used when the building's heating system requires extra volume.

10) When the heat pump is part of an integrated system. According to Eco-design Directive 811/2013

11) When the heat pump is the sole heat generator and the built-in controller is not included. According to Eco-design Directive 811/2013.

Thermia Heat Pumps reserves the right to make changes without further notice.